



AP 757
Hot & Warm



NWD AP-906
Hot & Cold



NWD 8988
Hot & Warm



NWD AP-9688
Hot & Warm



NWD AP-8998
Hot & Warm



IL 688
Hot & Cold



NWD 528
Hot & Cold



Yamada 838
RO.UV
Hot & Cold



CA 919
Hot, Cold & Warm



Yamada 919
RO.UV
Hot & Cold



NWD 369
Hot & Warm



NWD 370
Hot & Warm



NWD 3001
Hot & Cold



NWD 389-06-HW
Hot, Warm &
Normal



NWD 389-08-HW
Hot, Warm &
Normal



NWD 389-12-HW
Hot, Warm &
Normal



NWD 389-13-HW
Hot, Warm &
Normal



NWD 389-01
Normal, Warm &
Hot



NWD 389-02
Normal, Warm &
Hot



NWD 389-03
Normal, Warm &
Hot

DISPENSER STANDARD FEATURES: -

- Input/ output voltage : AC 220 V /50Hz
- Heating Temperature : 80°C
- Cooling Temperature : 5°C
- Compressor or Semi Conductor
- Features with Ozone or Freezer



NWD 389-04
Normal, Warm & Hot



IP 99
Hot, Warm & Normal



NWD 168
5 Steps Filtration
Hot, Warm & Normal



NWD 389-05
5 Steps Filtration
Hot, Warm & Normal



NWD 389-07
5 Steps Filtration
Hot, Warm & Normal



NWD 1010
Hot & Cold
Sizes (mm):
390 X 390 X 900




NWD 1011
Hot & Cold
Sizes (mm):
360 X 350 X 990



IL 688-01
Hot & Cold
Sizes (mm):
340X 330 X 950



IL 688-02
Hot & Cold
Sizes (mm):
345 X 330 X 970

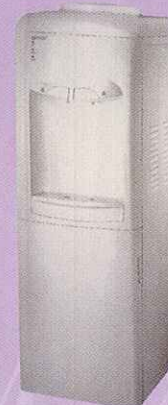

IL 688-03
Hot & Cold
Sizes (mm):
350 X 360 X 995



IL 688-04
Warm & Cold
Sizes (mm):
360 X 400 X 990



NWD CA929
Hot & Cold



NWD 1013
Hot & Cold



YMP 929 RO.UV
Hot & Cold



NWD 700
Hot & Cold



NWD 1308
Hot, Cold & Warm